

22 May 2006

Wire #	Gage	Color	From	To	Signal	Wire Color Chart		
						Pair	Wire1	Wire2
Drain	#26	Bare		Q1-1	Ground	P1	Yellow	White
		N/C	J1-1					
P4-2	#26	Black	J1-2	Q1-2	Ground	P2	Blue	Green
P3-1	#26	Brown	J1-3	Q1-3	Z-	P3	Brown	Orange
P3-2	#26	Orange	J1-4	Q1-4	Z+	P4	Red	Black
P1-1	#26	Yellow	J1-5	Q1-5	A-			
P1-2	#26	White	J1-6	Q1-6	A+			
P4-1	#26	Red	J1-7	Q1-7	Power			
		N/C	J1-8					
		N/C		Q1-8				
P2-1	#26	Blue	J1-9	Q1-9	B-			
P2-2	#26	Green	J1-10	Q1-10	B+			


# Encoder Interface Cable

## M-Grade System

> Connects Controller/Driver to Encoder

- M-Grade SilverDust D2

- M-Grade 17 & 23 Frame Motor/Encoder

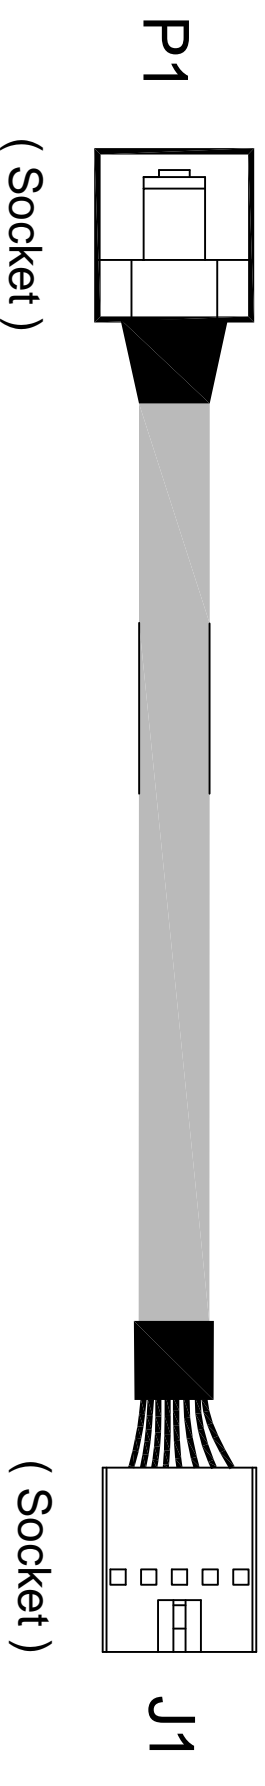

QCI-C-2BS-5AS-nn

( nn=length in feet )

\* Not Actual Size

Subject to change without notice